


INSTALLATION




both ends to mark locations of (3x)
mounting pegs [D].


3. Install pegs to blocking using (3x) #8-32 CSK screws [E] (by G.C).

4. Install REMOTE DRIVER ENCLOSURE [H] to building structure and attach BUILDING POWER using U.L. approved wire connectors. Run wiring from remote to standard 4.0 J-BOX [A] using at least 12AWG wiring and connect wiring (by E.C).

5. Place fixture pegs in blocking such that pegs sit in center holes in mounting blocks [F].

 Secure fixture with (1x) #8-32 set screw [G] per mounting block (provided by company).

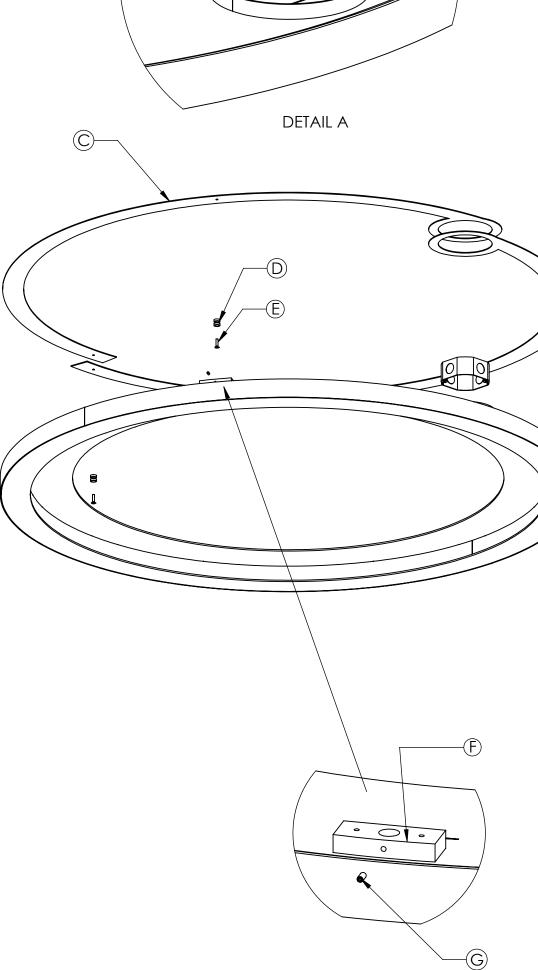

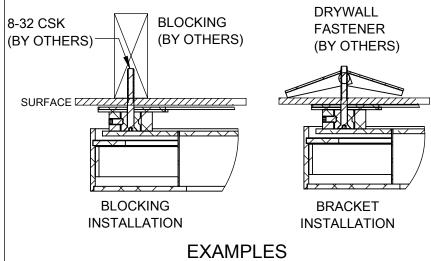

DETAIL B



