

INSTALLATION INSTRUCTIONS

CP Pendant and Surface



Page 1 of 3

IMPORTANT SAFETY INSTRUCTIONS

When installing or using this recessed fixture basic safety precautions should be followed

Read ALL INSTRUCTIONS before installing fixture.

- This fixture is intended for installation in accordance with the National Electric Code and Local and State Codes and must be installed by a licensed electrical contractor.
- DO NOT INSTALL THIS FIXTURE IN DAMP LOCATIONS.
- DO NOT INSTALL FIXTURE WITHOUT A MINIMUM 1/2 INCH CLEARANCE ALL AROUND THE FIXTURE. ENSURE CLEARANCE AT TOP OF CHANNEL IS 3 INCHES.
- THIS FIXTURE IS FOR INSTALLATION IN NON INSULATED CEILINGS ONLY.
- To prevent electrical shock, turn off electricity at fuse box before installing the fixture.
- Turn off power and allow fixture to cool down before adjusting position of lamp gimbals.
- Use AWG#12 wire only for supply to the fixture.

INSTALLATION INSTRUCTIONS

CP Pendant and Surface

TYPICAL INSTALLATION

ALWAYS FOLLOW APPLICABLE BUILDING CODES WHEN INSTALLING ANY LIGHT FIXTURE. DUE TO PRODUCT VARIATIONS AND CONFIGURATIONS, THESE INSTRUCTIONS SERVE ONLY AS A GENERAL GUIDE.


REFER TO FACTORY PROVIDED SUBMITTALS FOR DETAILS

Pendant





INSTRUCTION:

1. Plan Suspension points and JBOX Location
2. Install Ceiling Bullets by first attaching threaded bullet collar to ceiling, then thread bullet with retained suspension wire onto collar
3. Connect power cord to Junction box strap and make electrical connections
4. Re-attach canopy cover to threaded nipple

To re-lamp, locate fasteners on top of CP unit. Remove to allow the central lamp splice to be removed for access to LED and drivers



Installation (ensure all power is off).

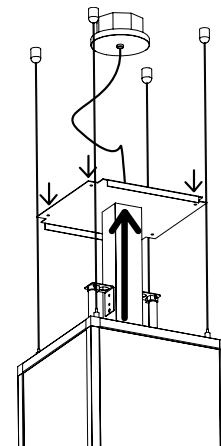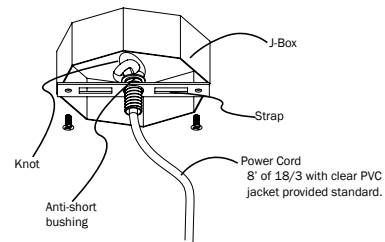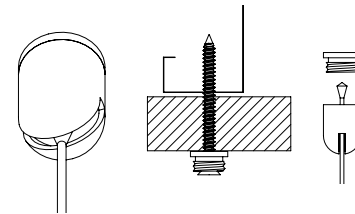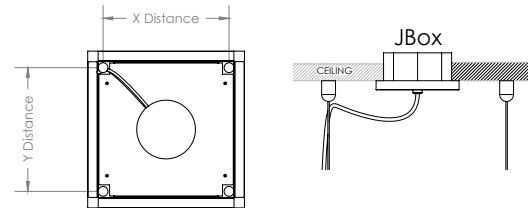

INSTALLATION INSTRUCTIONS

CP Pendant and Surface

TYPICAL INSTALLATION

ALWAYS FOLLOW APPLICABLE BUILDING CODES WHEN INSTALLING ANY LIGHT FIXTURE. DUE TO PRODUCT VARIATIONS AND CONFIGURATIONS, THESE INSTRUCTIONS SERVE ONLY AS A GENERAL GUIDE.


REFER TO FACTORY PROVIDED SUBMITTALS FOR DETAILS

Surface

INSTRUCTION:

1. Units should be installed to Conduit for access (no JBox access from below)
2. Make electrical connections via conduit and install ceiling plate ceiling.
3. Insert CP into ceiling plate at an angle, insert fully and swing fixture housing up
4. Align fasteners/set screws in sides and tighten to secure

To re-lamp, locate fasteners on top of CP unit. Remove to allow the central lamp splice to be removed for access to LED and drivers

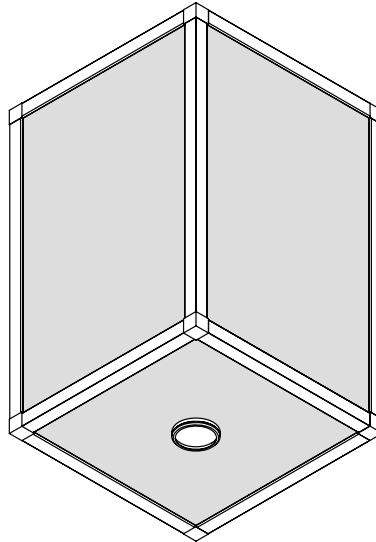

Installation (ensure all power is off).

