

LED Lighting Shipped in 10 Business Days or Less!

RECESSED PRODUCTS

2" APERTURE

LIGHTPLANE 2 (LP2)
SUPERPLANE 2.5 (SP2.5R)

3.5" APERTURE

LIGHTPLANE 3.5 (LP3.5R)

4" APERTURE

SUPERPLANE 4 (SP4R)

2' x 2'

CHECKBOX 2x2 (CB2x2)



SUSPENDED/SURFACE PRODUCTS

2" APERTURE


HBEAM 2 (HB2)
LIGHTPLANE 2 (LP2)
LIGHTPLANE 2 Up & Under (LP2UU)
SUPERPLANE 2.5 (SP2.5)

3.5" APERTURE

HBEAM 3.5 (HB3.5)
LIGHTPLANE 3.5 (LP3.5)

4" APERTURE

SUPERPLANE 4 (SP4)




SUPERPLANE Series with CONTROLROLL Optics

- CONTROLROLL Optics – seamless illumination up to 250 feet
- 5 lamping options
- Linear shapes, and 45° mitered corners
- Improved installation and serviceability
- DLC Listed




SP2.5



SP2.5R




SP4



SP4R



*SP4R Models

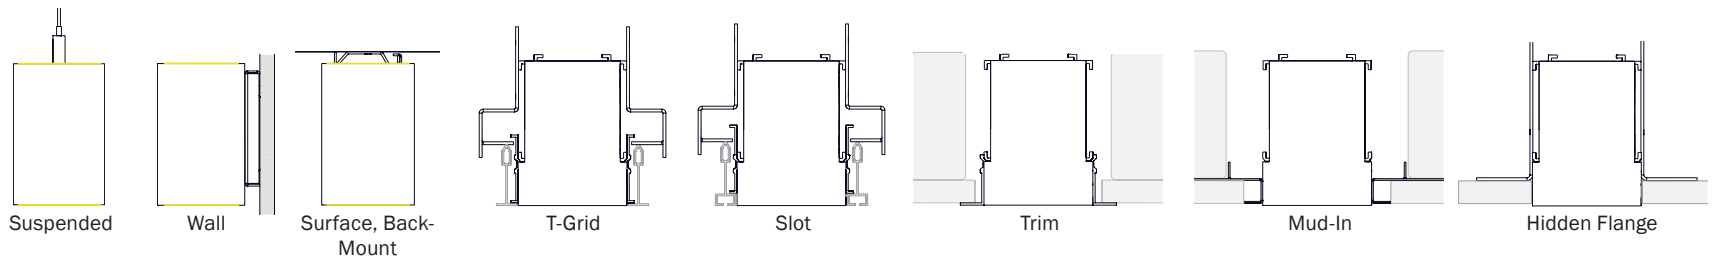


MODEL	CEILING/MOUNTING TYPE	LAMPING	LED OUTPUT	CRI & CCT	DRIVER OPTIONS	VOLTAGE	EMERGENCY BATTERY/CIRCUIT	OCCUPANCY SENSOR
SUPERPLANE 2.5	<ul style="list-style-type: none"> • Standard Suspension • Surface, Back-Mount • Wall Mount 	Direct, Indirect, Direct & Indirect	MIN LOW MED HI MAX	80+ CRI 3000K 3500K 4000K	0-10V 5% Dimming 0-10V 1% Dimming ECOSYS 1% Dimming	120V-277V (UNV)	YES	YES
SUPERPLANE 4								
SUPERPLANE 2.5 Recessed	<ul style="list-style-type: none"> • Mud-In • Trim • Hidden Flange • Slot (9/16") • T-Grid (9/16" & 15/16") • Armstrong® Techzone (9/16" Slot, 9/16" & 15/16" T-Grid) 	Direct Only						
SUPERPLANE 4 Recessed								

DLC LISTED MODELS	AVAILABLE CEILING TYPES	LAMPING	LED OUTPUT	CRI & CCT	DRIVER OPTIONS	VOLTAGE	EMERGENCY BATTERY/CIRCUIT	OCCUPANCY SENSOR
SUPERPLANE 4 Recessed – DLC Listed (Flush & Regressed Mount)	<ul style="list-style-type: none"> • Mud-In • Trim • Hidden Flange • Slot (9/16") • T-Grid (9/16" & 15/16") • Armstrong® Techzone (9/16" Slot, 9/16" & 15/16" T-Grid) 	Direct Only	MED HI MAX	80+ CRI 4000K	0-10V 5% Dimming 0-10V 1% Dimming	120V-277V (UNV)	YES	YES


QS011019-B.0

LIGHTPLANE Series


- 3 lamping options
- Linear shapes and 45° mitered corners*




LP2



LP2UU




LP2R




LP3.5



LP3.5R




Suspended




Wall




Surface, Back-Mount




T-Grid




Slot



Trim



Mud-In



Hidden Flange


MODEL	CEILING/MOUNTING TYPE	LAMPING	LED OUTPUT	CRI & CCT	DRIVER OPTIONS	VOLTAGE	EMERGENCY BATTERY/CIRCUIT	OCCUPANCY SENSORS
LIGHTPLANE 2 Up & Under	<ul style="list-style-type: none"> • Standard Suspension • Surface, Back-Mount • Wall Mount 	Direct & Indirect	LOW MED HI	80+ CRI 3000K 3500K 4000K	0-10V 5% Dimming 0-10V 1% Dimming ECOSYS 1% Dimming	120V-277V (UNV)	YES	YES
LIGHTPLANE 2		Direct or Indirect						
LIGHTPLANE 3.5		Direct or Indirect						
LIGHTPLANE 2 Recessed, Trimmed	<ul style="list-style-type: none"> • Mud-In • Trim • Hidden Flange • Slot • T-Grid • Armstrong® Techzone (T-Grid and Slot) 	Direct Only	LOW MED HI	80+ CRI 3000K 3500K 4000K	0-10V 5% Dimming 0-10V 1% Dimming ECOSYS 1% Dimming	120V-277V (UNV)	YES	YES
LIGHTPLANE 2 Recessed, Trimless (Mud-In)								
LIGHTPLANE 2 Recessed, Wall Grazer*								
LIGHTPLANE 3.5 Recessed, Trimmed								
LIGHTPLANE 3.5 Recessed, Trimless								
LIGHTPLANE 3.5 Recessed, Perimeter								
LIGHTPLANE 3.5 Recessed, Wall Washer*								

*LP2 Wall Grazer & LP3.5 Wall Washer only available in straight run sections.


Note: Not all models compatible with all ceiling types, see product specification sheets for more information.

HBEAM Series

- 3 lamping options
- Linear shapes and 45° mitered corners



HB2



HB3.5

MODEL	MOUNTING OPTIONS	LAMPING	LED OUTPUT	CRI & CCT	DRIVER OPTIONS	VOLTAGE	EMERGENCY BATTERY/CIRCUIT	OCCUPANCY SENSORS
HBEAM 2	<ul style="list-style-type: none"> • Standard Suspension • Wall-Mount 	Direct, Indirect, Direct & Indirect	LOW MED HI	80+ CRI 3000K 3500K 4000K	0-10V 5% Dimming 0-10V 1% Dimming ECOSYS 1% Dimming	120V-277V (UNV)	YES	YES
HBEAM 3.5								

CHECKBOX 2' x 2'

- 3 lamping options
- Expedited shipping available in as little as 2 business days!



CB2x2

MODEL	CEILING TYPE	SIZE	LED OUTPUT	CRI & CCT	DRIVER OPTIONS	VOLTAGE	EMERGENCY BATTERY	OCCUPANCY SENSORS
Checkbox 2x2 (CB2x2)	<ul style="list-style-type: none"> • Slot • T-Grid • Armstrong® Techzone 	2' x 2'	LOW MED HI	80+ CRI 3500K	0-10V 5% Dimming 0-10V 1% Dimming	120V-277V (UNV)	YES	YES